



Truefashion Projector GCGM

RS700B LED20 940PW PSU MB WH

Lens -

The Truefashion Projector is ideal for the retail segment with its attractive outlook design, excellent quality of light and dedicated light recipe, as well as system connectivity, to create a comfortable ambience and impressive shopping experience to stimulate the sales for retail customers.

Warnings and Safety

• 3 years

Product data

General Information	
Lamp colour code	940 neutral white
Optical cover/lens type	Lens
Control interface	-
Protection class IEC	Safety class II (II)
CE mark	CE mark
Number of products on MCB (16 A type B)	1
Light source engine type	LED
Operating and Electrical	
Input Voltage	220 to 240 V
Input frequency	50 or 60 Hz
Power factor (min.)	0.97

Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Housing material	Aluminium
Optical cover/lens material	Polymethyl methacrylate
Optical cover/lens finish	-
Overall height	70 mm
Overall diameter	96 mm
Colour	White RAL 9003
Approval and Application	
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	-

Truefashion Projector GCGM

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	1829 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	86 lm/W
Lamp colour temperature	4000 K
Colour Rendering Index	>90
Initial input power	21 W
Power consumption tolerance	+/-10%

Application Conditions


Ambient temperature range	-15 to +35 °C
---------------------------	---------------

Product Data

Full product code	911401520071
Order product name	RS700B LED20 940PW PSU MB WH
Order code	911401520071
SAP numerator – quantity per pack	1
Numerator – packs per outer box	1
SAP material	911401520071
SAP net weight (piece)	0.330 kg



Dimensional drawing

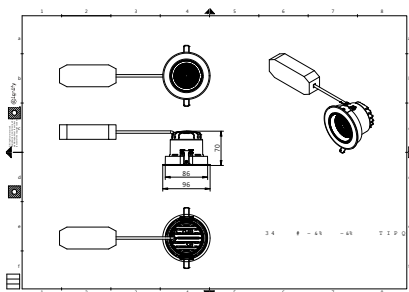

RS700B LED20 940PW PSU MB WH

