



Truefashion Projector GCGM

RS700B LED30 940PW PSU MB WH

Lens

The Truefashion Projector is ideal for the retail segment with its attractive outlook design, excellent quality of light and dedicated light recipe, as well as system connectivity, to create a comfortable ambience and impressive shopping experience to stimulate the sales for retail customers.

Warnings and Safety

- 3 years

Product data

General Information	
Lamp colour code	940 neutral white
Optical cover/lens type	Lens
Control interface	-
Protection class IEC	Safety class II (II)
CE mark	CE mark
Number of products on MCB (16 A type B)	1
Light source engine type	LED

Operating and Electrical	
Input Voltage	220 to 240 V
Input frequency	50 or 60 Hz
Power factor (min.)	0.95

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Housing material	Aluminium
Optical cover/lens material	Polymethyl methacrylate
Optical cover/lens finish	-
Overall height	100 mm
Overall diameter	111 mm
Colour	White RAL 9003

Approval and Application	
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	-

Truefashion Projector GCGM

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	3076 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	100 lm/W
Lamp colour temperature	4000 K
Colour Rendering Index	>90
Initial input power	31 W
Power consumption tolerance	+/-10%

Application Conditions


Ambient temperature range	-15 to +35 °C
---------------------------	---------------

Product Data

Full product code	911401520971
Order product name	RS700B LED30 940PW PSU MB WH
Order code	911401520971
SAP numerator – quantity per pack	1
Numerator – packs per outer box	1
SAP material	911401520971
SAP net weight (piece)	0.630 kg



Dimensional drawing

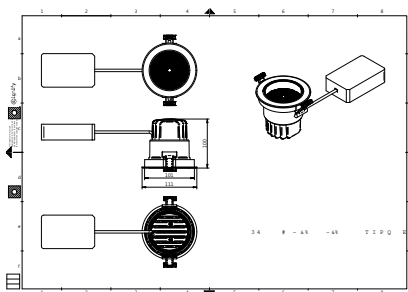

Spotlight/ projector LED

