



Truefashion Projector GCGM

RS700B LED30 930PW PSD VLC NB WH

Lens -

The Truefashion Projector is ideal for the retail segment with its attractive outlook design, excellent quality of light and dedicated light recipe, as well as system connectivity, to create a comfortable ambience and impressive shopping experience to stimulate the sales for retail customers.

Warnings and Safety

- 3 years

Product data

General information	
Lamp colour code	930 warm white
Optical cover/lens type	Lens
Control interface	DALI
Protection class IEC	Safety class II (II)
CE mark	CE mark
Number of products on MCB (16 A type B)	1
Light source engine type	LED
Operating and electrical	
Input Voltage	220 to 240 V
Input frequency	50 or 60 Hz
Power factor (min.)	0.95

Controls and dimming	
Dimmable	Yes
Mechanical and housing	
Housing material	Aluminium
Optical cover/lens material	Polymethyl methacrylate
Optical cover/lens finish	-
Overall height	100 mm
Overall diameter	111 mm
Colour	White RAL 9003
Approval and application	
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	-

Truefashion Projector GCGM

Initial performance (IEC compliant)

Initial luminous flux (system flux)	3159 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	89 lm/W
Lamp colour temperature	3000 K
Colour Rendering Index	>90
Initial input power	35 W
Power consumption tolerance	+/-10%

Application conditions


Ambient temperature range	-15 to +35 °C
---------------------------	---------------

Product data

Full product code	911401522471
Order product name	RS700B LED30 930PW PSD VLC NB WH
Order code	911401522471
SAP numerator – quantity per pack	1
Numerator – packs per outer box	1
SAP material	911401522471
Net Weight (Piece)	0.650 kg



Dimensional drawing

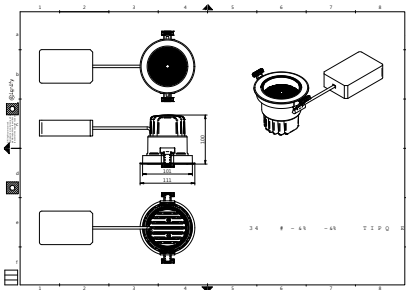

RS700B LED30 930PW PSD VLC NB WH

