



Truefashion Projector GCGM

ST700T LED30 930PW PSU WB 3C WH

Fashion proof optic beam angle 36°

The Truefashion Projector is ideal for the retail segment with its attractive outlook design, excellent quality of light and dedicated light recipe, as well as system connectivity, to create a comfortable ambience and impressive shopping experience to stimulate the sales for retail customers.

Warnings and Safety

- 3 years

Product data

General Information		Controls and Dimming	
Lamp colour code	PremiumWhite with CRI ≥90, and colour temperature 3,000 K	Dimmable	No
Optical cover/lens type	Fashion proof optic beam angle 36°	Mechanical and Housing	
Control interface	-	Housing material	Aluminium
Protection class IEC	Safety class II (II)	Optical cover/lens material	Polymethyl methacrylate
CE mark	CE mark	Optical cover/lens finish	Clear
Number of products on MCB (16 A type B)	-	Overall length	226 mm
Light source engine type	-	Overall height	194 mm
Operating and Electrical		Overall diameter	80 mm
Input Voltage	220 to 240 V	Colour	White and black
Input frequency	50 or 60 Hz	Approval and Application	
Power factor (min.)	0.9	Ingress protection code	IP20 [Finger-protected]

Truefashion Projector GCGM

Mech. impact protection code	-
------------------------------	---

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	3001.68 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	80.91313609467456 lm/W
Lamp colour temperature	3000 K
Colour Rendering Index	>90
Initial input power	37.1 W
Power consumption tolerance	+/-10%

Application Conditions


Ambient temperature range	-20 to +35 °C
---------------------------	---------------

Product Data

Full product code	911401575861
Order product name	ST700T LED30 930PW PSU WB 3C WH
Order code	911401575861
SAP numerator – quantity per pack	1
Numerator – packs per outer box	1
SAP material	911401575861
SAP net weight (piece)	0.599 kg



Dimensional drawing

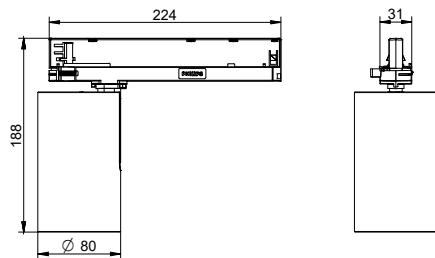

ST700T Truefashion Projector GCGM

