



# HF-Selectalume II for TL-D lamps

## HF-S 218/236 TL-D II 220-240V 50/60Hz

HF-Selectalume II is the most cost-effective, reliable, slim and affordable fluorescent solution, with highly disruptive technology for energy saving, system flexibility and unsurpassed performance. The cost-saving HF-Selectalume II has a robust design which meets all relevant international safety and performance standards. HF-Selectalume II is intended for use with indoor lighting fixtures such as spotlights, downlights and recessed luminaires, which are largely used in office, retail, industry, hotel, restaurant and other applications where control devices are installed with occasional On/Off switching activity

### Product data

General Information		Connector Type Output Terminals	
Number of Lamps	2 piece/unit	Connector Type Output Terminals	WAGO 744 connector [Suitable for manual wiring]
Operating and Electrical		Temperature	
Input Voltage	220 to 240 V	Ambient temperature range	-20 °C to 55 °C
Line Frequency	50 to 60 Hz	T-Case Lifetime (Nom)	75 °C
Input Frequency	50 to 60 Hz	T-Case Maximum (Max)	75 °C
Earth Leakage Current (Max)	0.5 mA	Mechanical and Housing	
Inrush Current Width	0.35 ms	Housing	L 280x30x28
Inrush Current Peak (Max)	18 A	Approval and Application	
Number of Products on MCB (16A Type B) (Nom)	28	Ingress protection code	IP20 [Finger-protected]
Wiring		Energy Efficiency Index	A2 BAT
Connector Type Input Terminals	WAGO 744 connector	Approval Marks	F-Marking CE marking ENEC certificate CCC certificate C-Tick certificate PSB certification TISI


## HF-Selectalume II for TL-D lamps

	marking SIRIM approval CB Certificate CCC certificate VDE-EMV certificate
<b>Product Data</b>	
Full product code	872790090553300
Order product name	HF-S 218/236 TL-D II 220-240V 50/60Hz
Order code	913713032466
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	12
Material number (12NC)	913713032466
Full product name	HF-S 218/236 TL-D II 220-240V 50/60Hz
EAN/UPC - Case	8727900905533



### Dimensional drawing

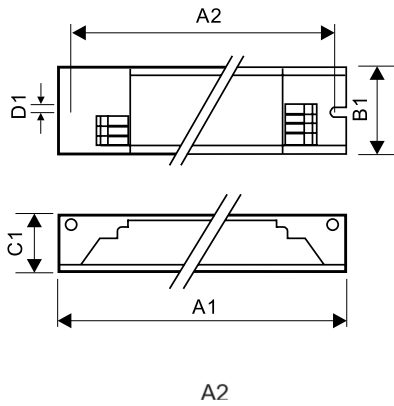

<b>Product</b>
HF-S 218/236 TL-D II 220-240V 50/60Hz

Product	A1	B1	C1	A2	B2	D1
HF-S 218/236 TL-D II 220-240V 50/60Hz	280 mm	30 mm	28 mm	265 mm		4.2 mm

