



Actinic BL PL-S/PL-L

Actinic BL PL-S 9W/10/2P 1CT/6X10BOX

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Lamp current (nom.)		0.17 A
Cap base	G23 [G23]	Voltage (Nom)	60 V	
Main application	Insect traps	Mechanical and Housing		
Life to 50% failures (nom.)	1000 h	Cap-base information	2 Pins (2P)	
Useful life (nom.)	2000 h	Bulb shape	2xT12	
Light Technical		UV		
Colour Code	210 [leadfree 360 glass (10)]	UV-B/UV-A (IEC)	0.1 %	
Colour Designation	Ultra Violet A	UV-A radiation 100 hours (IEC)	1.66 W	
Chromaticity coordinate X (nom.)	227	Product Data		
Chromaticity coordinate Y (nom.)	212	Full product code	871150095194680	
UV Depreciation at 2,000 h	20 %	Order product name	Actinic BL PL-S 9W/10/2P 1CT/6X10BOX	
Operating and Electrical		EAN/UPC – product	8711500951946	
Power (Rated) (Nom)	8.6 W			

Actinic BL PL-S/PL-L

Order code	927901721008
SAP numerator – quantity per pack	1
Numerator – packs per outer box	60
SAP material	927901721008

SAP net weight (piece)	32.000 g
------------------------	----------



Dimensional drawing



Product	D1 (max)	D (max)	A (max)	B (max)	C (max)
Actinic BL PL-S 9W/10/2P 1CT/6X10BOX	13 mm	28 mm	128.8 mm	144.5 mm	167 mm

PL-S 9W/210/2P

Photometric data

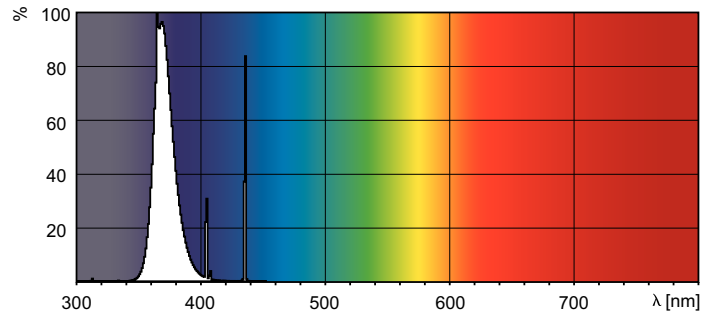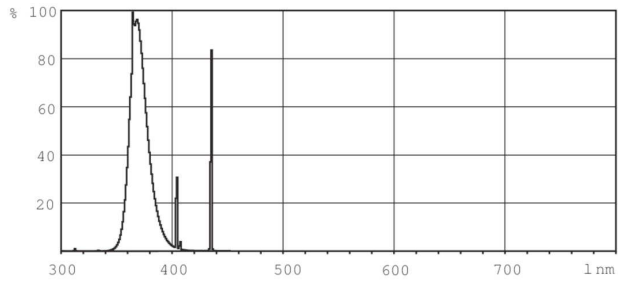

Lightcolour /10, /110 & /210

Lightcolour /10, /110 & /210

