



TL-D LIFEMAX Super 80

TL-D 58W/840 1SL/25


The TL-D LIFEMAX Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

Product data

Operating and Electrical		Mechanical and Housing	
Power Consumption	58.5 W	Bulb Shape	T8 [26 mm (T8)]
Lamp Current (Nom)	0.670 A		
Voltage (Nom)	111 V	Approval and Application	
Voltage (Nom)	111 V	Mercury (Hg) Content (Nom)	2.0 mg
General Information		Product Data	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Full product code	871150028492140
Nominal lifetime	15,000 hour(s)	Order product name	TL-D 58W/840 1SL/25
Light Technical		Order code	927983284036
Color Code	840 [CCT of 4000K]	Numerator - Quantity Per Pack	1
Color Designation	Cool White (CW)	Numerator - Packs per outer box	25
Correlated Color Temperature (Nom)	4000 K	Material number (12NC)	927983284036
Luminous Efficacy (rated) (Nom)	88 lm/W	Full product name	TL-D 58W/840 1SL/25
Color rendering index (CRI)	82	EAN/UPC - Case	8711500284938
Controls and Dimming			
Dimmable	Yes		



TL-D LIFEMAX Super 80

Dimensional drawing

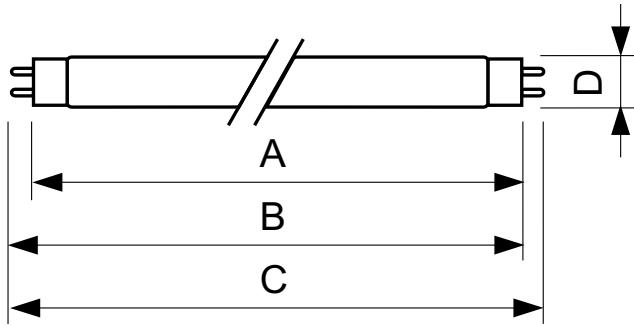


Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 58W/840 1SL/25	28 mm	1,500.0 mm	1,507.1 mm	1,504.7 mm	1,514.2 mm

Lifetime

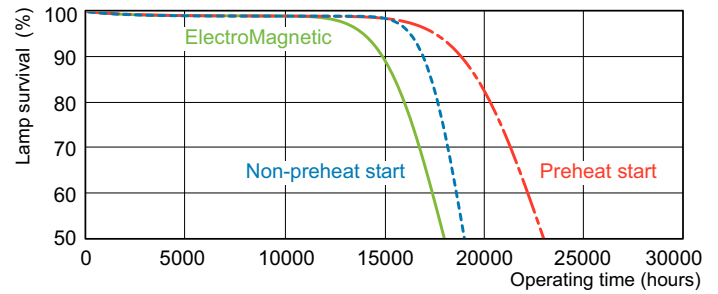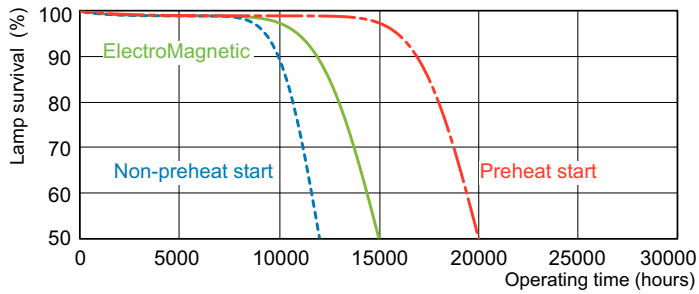

Life Expectancy Diagram - TL-D 58W/840 1SL/25

Life Expectancy Diagram - TL-D 58W/840 1SL/25

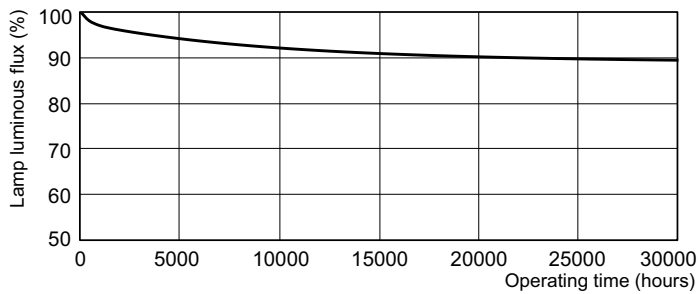

Lumen Maintenance Diagram - TL-D 58W/840 1SL/25

TL-D LIFEMAX Super 80

