



TL-D Standard Colours

TL-D 30W/54-765 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


Operating and Electrical		Color rendering index (CRI)	
Power Consumption	30.0 W		72
Lamp Current (Nom)	0.360 A	Controls and Dimming	
Voltage (Nom)	98 V	Dimmable	Yes
Voltage (Nom)	98 V	Mechanical and Housing	
General Information		Bulb Shape	T8 [26 mm (T8)]
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Approval and Application	
Nominal lifetime	13,000 hour(s)	Mercury (Hg) Content (Nom)	5.0 mg
Light Technical		Energy Consumption kWh/1000 h	36 kWh
Color Code	54-765	Product Data	
Luminous Flux	1,825 lumen	Full product code	871150072263800
Color Designation	Cool Daylight	Order product name	TL-D 30W/54-765 1SL/25
Correlated Color Temperature (Nom)	6200 K	Order code	928025405482

TL-D Standard Colours

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material number (12NC)	928025405482
Full product name	TL-D 30W/54-765 1SL/25


EAN/UPC - Case	8711500722645
----------------	---------------

Dimensional drawing

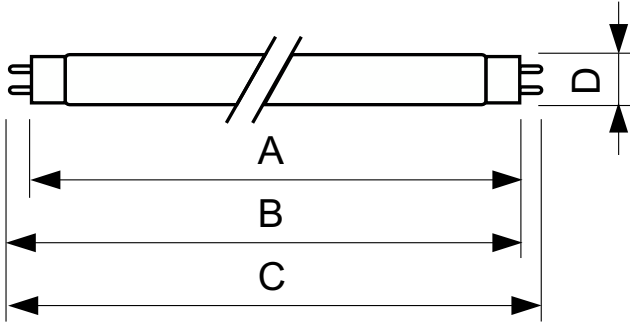


Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 30W/54-765 1SL/25	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm

Photometric data




Spectral Power Distribution Colour - TL-D 30W/54-765 1SL/25

Lifetime

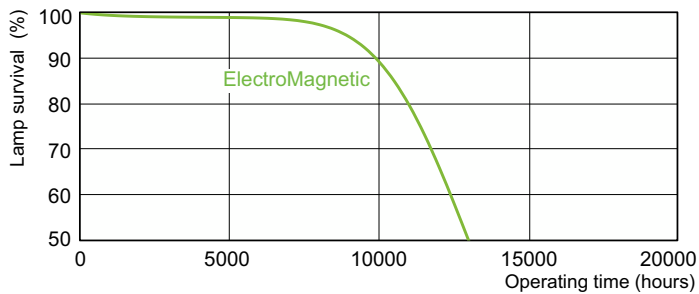


Life Expectancy Diagram - TL-D 30W/54-765 1SL/25

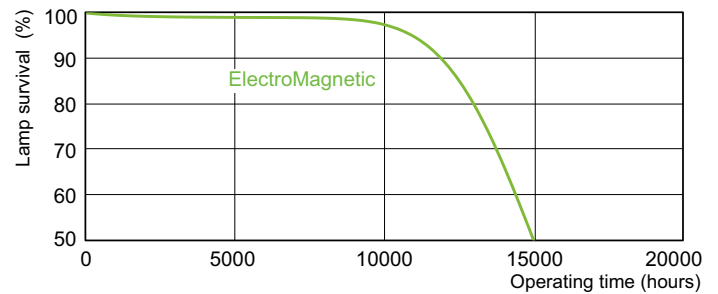

Life Expectancy Diagram - TL-D 30W/54-765 1SL/25

TL-D Standard Colours

Lifetime

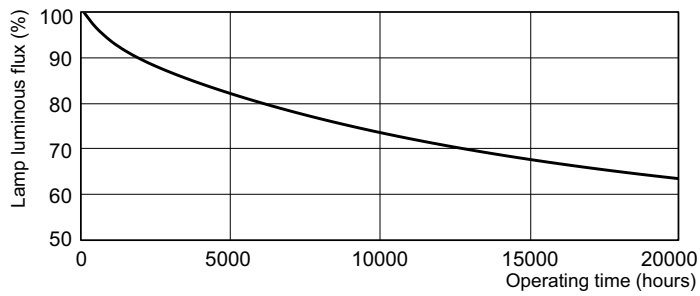

Lumen Maintenance Diagram - TL-D 30W/54-765 1SL/25

