



# TL-D Standard Colours

## TL-D 30W/54-765 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


### Product data

General Information		Voltage (Nom)	
Cap base	G13 [ Medium Bi-Pin Fluorescent]	98 V	
Life to 10% failures (nom.)	10000 h	Controls and Dimming	
Life to 50% failures (nom.)	13000 h	Dimmable	Yes
Light Technical		Mechanical and Housing	
Colour Code	54-765	Bulb shape	T8 [ 26 mm (T8)]
Lamp Luminous Flux 25°C EL (Nom)	1825 lm	Approval and Application	
Colour Designation	Cool Daylight	Mercury (Hg) content (nom.)	8.0 mg
Lumen maintenance 10,000 hours (nom.)	75 %	Energy consumption kWh/1,000 hours	36 kWh
Lumen maintenance 2,000 hours (nom.)	90 %	Product Data	
Lumen maintenance 5,000 hours (nom.)	80 %	Full product code	871150072263800
Colour Temperature, horizontal (Nom)	6200 K	Order product name	TL-D 30W/54-765 1SL/25
Colour Rendering Index,horiz (Nom)	72	EAN/UPC – product	8711500722638
Operating and Electrical		Order code	928025405482
Power (Rated) (Nom)	30.0 W	SAP numerator – quantity per pack	1
Lamp current (nom.)	0.360 A	Numerator – packs per outer box	25

# TL-D Standard Colours

SAP material	928025405482
SAP net weight (piece)	0.130 kg
ILCOS code	FD-30/62/2A-E-G13


## Dimensional drawing

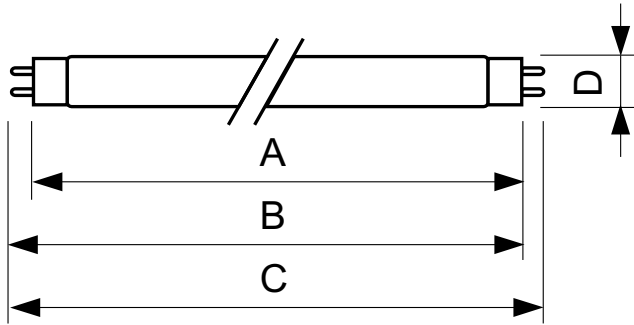


TL-D 30W/54-765

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 30W/54-765 1SL/25	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm

## Photometric data

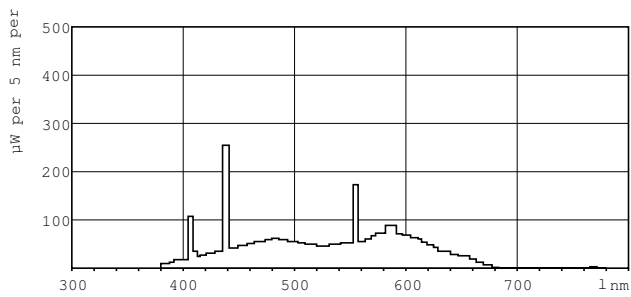


Lightcolour /54-765

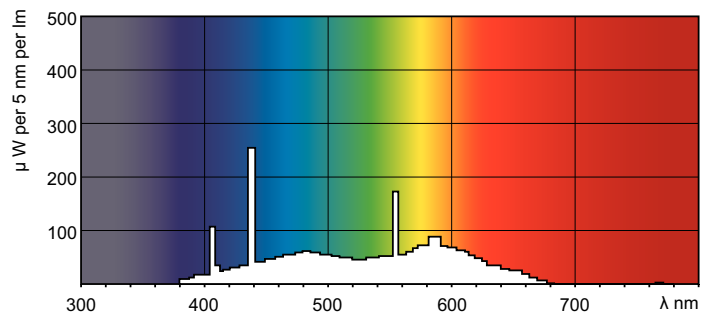


Lightcolour /54-765

## Lifetime

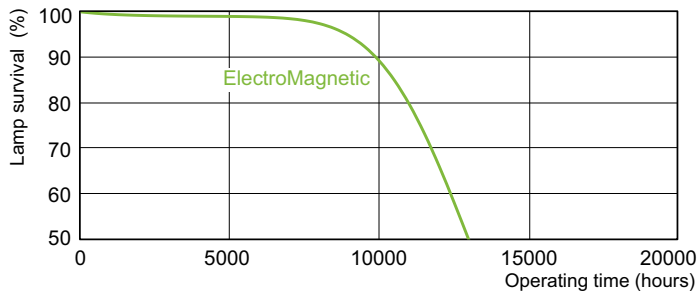


LDLE\_TL-DSTD\_0001-Life expectancy diagram

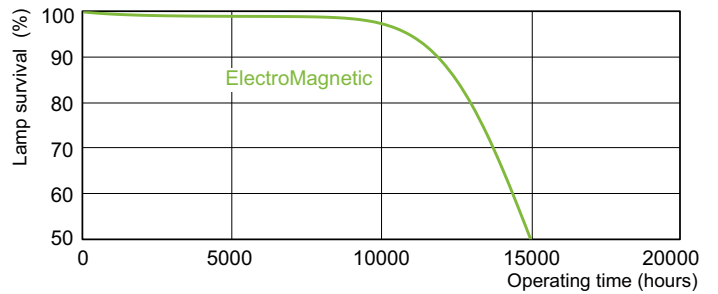

LDLE\_TL-DSTD\_0002-Life expectancy diagram

## TL-D Standard Colours

### Lifetime

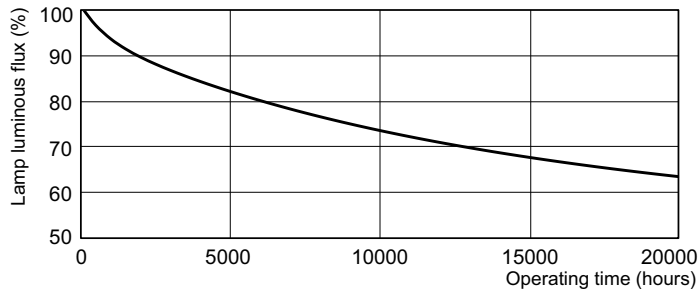

LDLM\_TL-DSTD\_0001-Lumen maintenance diagram

