



TL-D Standard Colours

TL-D 36W/33-640 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Product data

General information		Voltage (Nom)	
Cap base	G13 [Medium Bi-Pin Fluorescent]	103 V	
Life to 10% failures (nom.)	10000 h	Controls and dimming	
Life to 50% failures (nom.)	13000 h	Dimmable	Yes
Light technical		Mechanical and housing	
Colour Code	33-640	Bulb shape	T8 [26 mm (T8)]
Lamp Luminous Flux 25°C EL (Nom)	2850 lm	Approval and application	
Colour Designation	Cool White (CW)	Mercury (Hg) content (nom.)	5.0 mg
Lumen maintenance 10,000 hours (nom.)	75 %	Energy consumption kWh/1,000 hours	43 kWh
Lumen maintenance 2,000 hours (nom.)	90 %	Product data	
Lumen maintenance 5,000 hours (nom.)	80 %	Full product code	871150070270801
Colour Temperature, horizontal (Nom)	4100 K	Order product name	TL-D 36W/33-640 1SL/25
Colour Rendering Index,horiz (Nom)	63	EAN/UPC – product	8711500702708
Operating and electrical		Order code	928048503382
Power (Rated) (Nom)	36.0 W	SAP numerator – quantity per pack	1
Lamp current (nom.)	0.440 A	Numerator – packs per outer box	25

TL-D Standard Colours

SAP material	928048503382
Net Weight (Piece)	0.140 kg
ILCOS code	FD-36/41/2B-E-G13


Dimensional drawing

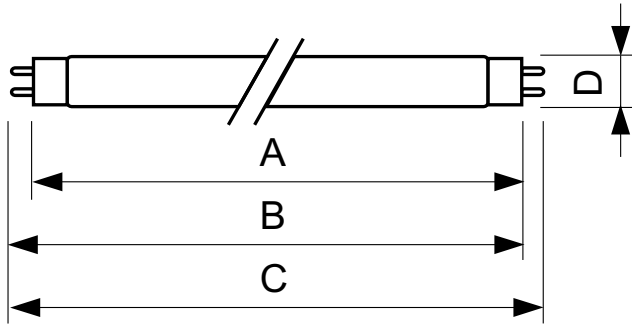

TL-D 36W/33-640 1SL/25

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 36W/33-640 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm


Photometric data

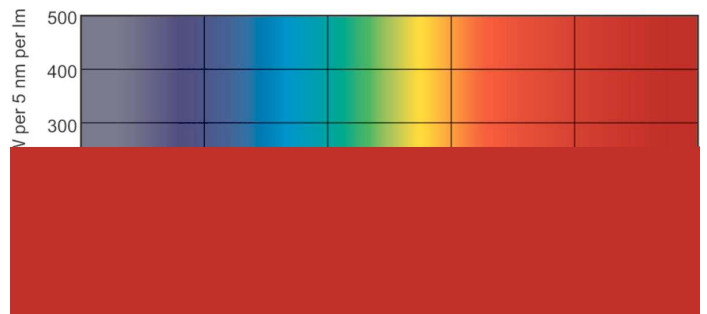


Lightcolour /33-640

Lightcolour /33-640

Lifetime

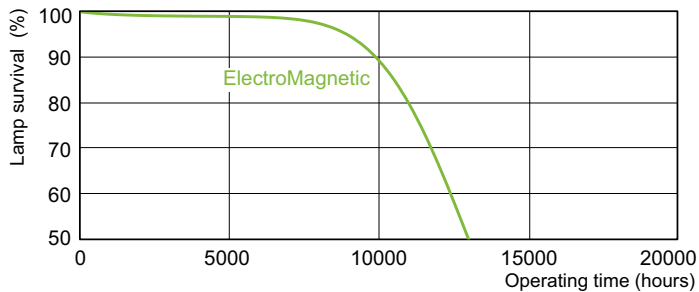


LDLE_TL-DSTD_0001-Life expectancy diagram

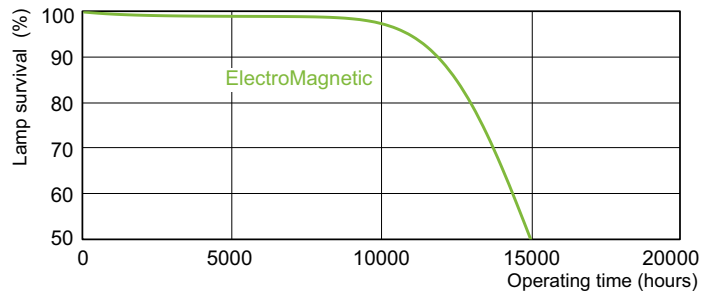

LDLE_TL-DSTD_0002-Life expectancy diagram

TL-D Standard Colours

Lifetime

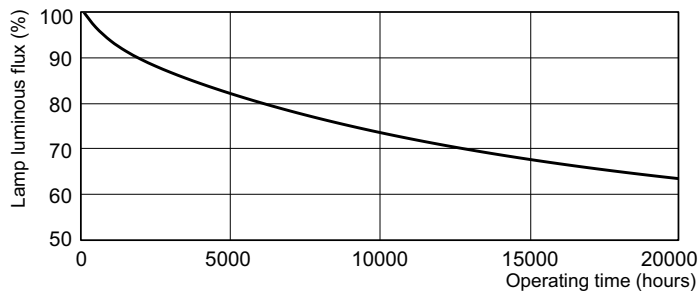

LDLM_TL-DSTD_0001-Lumen maintenance diagram

