



MSR

MSR 1200/2.1CT/3

MSR – bright vivid colours, always The high colour rendering index of the single ended MSR series ensures that everyone in the audience can enjoy the true colours of the scenery, the stage props, the players and their costumes – in fact everything that is on stage can be made bright and vivid in daylight quality light. Also, thanks to the single ended lamp concept, the luminaire has optimal light collection and direction possibilities to help ensure brightness on stage exactly where and when it is needed. In addition, the MSR can be used in any burning position for easy set-up and convenience.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


Operating and Electrical	
Power Consumption	1,200 W
Lamp Current (Nom)	13.8 A
General Information	
Cap-Base	G22 [G22]
Operating Position	UNIVERSAL [Any or Universal (U)]
Light Technical	
Color Code	2
Luminous Flux	104,000 lumen
Chromaticity Coordinate X (Nom)	302
Chromaticity Coordinate Y (Nom)	320
Correlated Color Temperature (Nom)	7200 K
Luminous Efficacy (rated) (Nom)	87 lm/W
Color rendering index (CRI)	85
Controls and Dimming	
Dimmable	No
Product Data	
Full product code	872790091133600

MSR

Order product name	MSR 1200/2.1CT/3
Order code	928171805114
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	3
Material number (12NC)	928171805114


Full product name	MSR 1200/2.1CT/3
EAN/UPC - Case	8727900911343

Dimensional drawing



Product	D (max)	O	L (min)	L (max)	L	C (max)	F
MSR 1200/2.1CT/3	40 mm	10.0 mm	84 mm	86 mm	85 mm	175 mm	53 mm

Photometric data

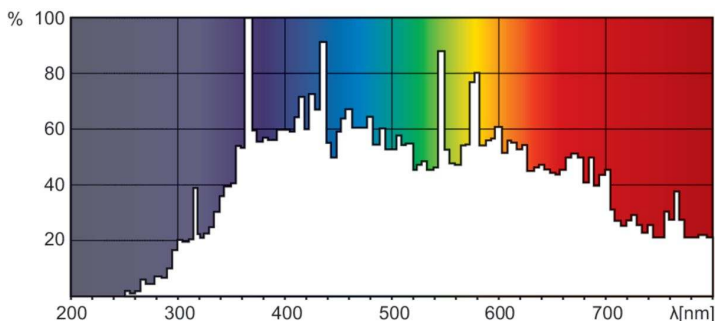

Spectral Power Distribution Colour - MSR 1200/2.1CT/3

