



# Truefashion Projector GCGM

## ST700T LED30 930PW PSD VLC WB BK

Fashion proof optic beam angle 36°

The Truefashion Projector is targeted towards the mid-high-end retail segment with an attractive outlook design, excellent quality of light and dedicated light recipes, as well as system connectivity, in order to create a comfortable ambience and impressive shopping experience to stimulate sales for retail customers.

### Warnings and Safety

- 3 years

### Product data

General Information	
Lamp colour code	PremiumWhite with CRI ≥90, and colour temperature 3,000 K
Optical cover/lens type	Fashion proof optic beam angle 36°
Control interface	DALI
Protection class IEC	Safety class II (II)
CE mark	CE mark
Number of products on MCB (16 A type B)	-
LED engine type	-
Operating and Electrical	
Input Voltage	220 to 240 V
Input frequency	50 or 60 Hz
Power factor (min.)	0.9

Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Housing material	Aluminium
Optical cover/lens material	Polymethyl methacrylate
Optical cover/lens finish	Clear
Overall length	226 mm
Overall height	194 mm
Overall diameter	80 mm
Colour	White and black
Approval and Application	
Ingress protection code	IP20 [ Finger-protected]


# Truefashion Projector GCGM

Mech. impact protection code	-
<b>Initial Performance (IEC Compliant)</b>	
Initial luminous flux (system flux)	3001.68 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	85.84686390532543 lm/W
Lamp colour temperature	3000 K
Colour Rendering Index	>90
Initial input power	35 W
Power consumption tolerance	+/-10%
<b>Application Conditions</b>	
Ambient temperature range	-20 to +35 °C

<b>Product Data</b>	
Full product code	911401576061
Order product name	ST700T LED30 930PW PSD VLC WB BK
Order code	911401576061
Numerator – quantity per pack	1
SAP numerator – packs per outer box	1
Material no. (12 NC)	911401576061
Net Weight (Piece)	0.899 kg



## Dimensional drawing

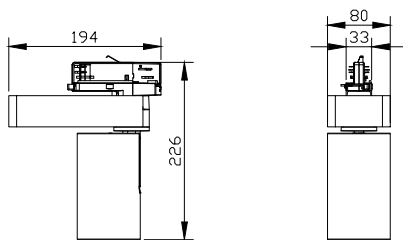

ST700T Truefashion Projector GCGM

